



549.143

Clutches

V-CAM 814

V-Cam 814 with **silver anodized aluminium lever**, quadruple clutch, for lines Ø12-14.

V-Cam 814 has a box-structure in **UV-resistant resin** with S.Steel reinforcements, aluminium base, V-Cam and aligning bushing in AISI316.

It can be **completely dismantled** for simple maintenance and repairing.

Retrieval can be performed with the stopper closed; the operation automatically secures itself in the new position.




Via del Progresso 18/20 35127 — Padova (PD), Italy (+39) 049 8701265

antal@antal.it

Antal Srl a socio unico © 2026

VAT IT00699000287

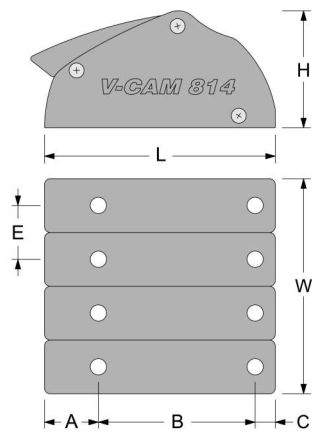

Via del Progresso 18/20 35127 — Padova (PD), Italy (+39) 049 8701265

antal@antal.it

Antal Srl a socio unico © 2026

VAT IT00699000287

Technical characteristics

Length (L)

154,5 mm

Width (W)

123 mm

Height (H)

78 mm

Weight

2,1 kg

Ø min line

12 mm

Ø max line

14 mm

A

36 mm

B

105 mm

C

13,5 mm

E

29 mm

Type

Quadruple

Fixing screws

8 × Ø8 mm

MWL

1500 kg