


Installation and Maintenance Manual

MRW-F

Powered Radial Winch 40.2 ST EL

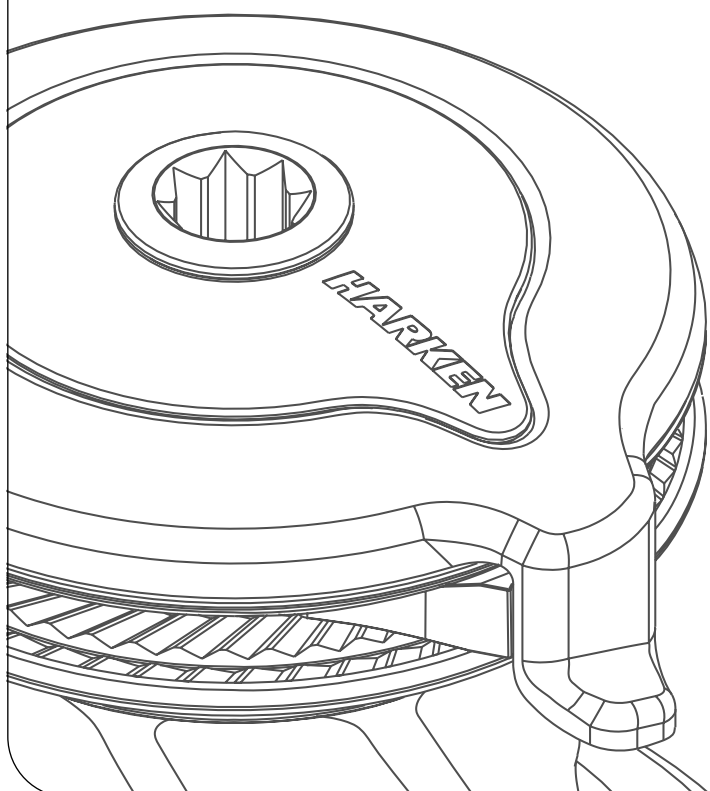

HARKEN®

Introduction	3
Technical characteristics	3
<i>Maximum working load</i>	3
<i>Performance data</i>	4
<i>Weight</i>	4
Outline	5
Installation	7
<i>Procedure 1</i>	8
<i>Procedure 2</i>	9
<i>Winch installation procedure</i>	11
<i>Positioning the self-tailing arm</i>	12
Motor installation procedure	12
<i>Electric wiring diagrams</i>	12
Maintenance	15
<i>Washing</i>	15
<i>Maintenance table</i>	15
<i>Disassembly procedure</i>	15
<i>Exploded view with maintenance products</i>	19
<i>Assembly</i>	20
Harken® limited worldwide warranty	21
Ordering spare parts	21
Exploded view	22
<i>Radial Winch 40.2 STA, STC, STCW EL</i>	22
Parts List	24
<i>Radial Winch 40.2 STA EL</i>	24
<i>Radial Winch 40.2 STC EL</i>	25
<i>Radial Winch 40.2 STCW EL</i>	26
Exploded view	27
<i>Radial Winch 40.2 STBBB, STCCC EL</i>	27
Parts List	29
<i>Radial Winch 40.2 STBBB EL</i>	29
<i>Radial Winch 40.2 STCCC EL</i>	30
Exploded view	31
<i>Horizontal electric motor 12V / 24V / 48V</i>	31
Parts List	31
<i>Horizontal electric motor 12V / 24V / 48V</i>	31

Introduction

This manual gives technical information on winch installation and maintenance, including disassembling and reassembling.

This manual is available only in English. If you do not fully understand the English language, do not carry out the operations described in this manual.

This information is **DESTINED EXCLUSIVELY** for specialised personnel or expert users.

Installation, disassembling and reassembling of the winch by personnel who are not experts may cause serious damage to users and those in the vicinity of the winch.

Harken accepts no responsibility for defective installation or reassembly of its winches.

Installing third-party electrification kits voids the Harken® Limited Worldwide Warranty.

The installer is responsible for complying with all applicable safety regulations:

- Any residual risks must be analyzed based on the boat on which the system is installed and must be managed exclusively by the installing contractor.
- A safety management system must be implemented on each boat, including one or more emergency buttons.

The user remains responsible for the proper inspection and maintenance of each component of the system installed aboard.

Harken assumes no responsibility for the final design or the consequences of an accident.

In case of doubt the Harken Tech Service is at your disposal at techservice@harken.it

NOTICE

To use and understand this manual, user must refer to other documents, available on web site www.harken.com and listed below:

- The Dual Function Control Box user manual, for the use of the Dual Function Control Box.
- The Dual Function Control Box installation manual, for all details, informations, wiring schemes and warnings about its installation

Technical characteristics

	Power ratio	Gear ratio
1st speed	13,50 : 1	2,13 : 1
2nd speed	39,90 : 1	6,28 : 1

The theoretical power ratio does not take friction into account.

Maximum working load



WARNING!

The maximum working load (MWL) for the 40.2 ST Radial Winch is 850 Kg (1874 lb). Subjecting the winch to loads above the maximum working load can cause the winch to fail or pull off the deck suddenly and unexpectedly during high loads causing severe injury or death.

Performance data
Winch 40.2 ST EL (electric)

	horizontal motor			
	12V (700 W)		24V (900 W)	
	1st speed	2nd speed	1st speed	2nd speed
line speed (m/min)**	23,2	7,9	28,7	9,8
max load (Kg)	290	850	290	850

***Line speed is measured with no load*

	motor nominal power (W)		current absorption at winch MWL (A)	
	12V	24V	12V	24V
horizontal	700	900	170	90

Weight

	ST A EH	ST C/CW EH	ST BBB EH	ST CCC EH
weight (Kg)	13,5	15,1	15,9	15,9

Versions:

A = drum in anodised aluminium



C = drum in chrome bronze


CW = chrome/white

BBB = all bronze

CCC = All-Chrome bronze

EH = horizontal electric winch

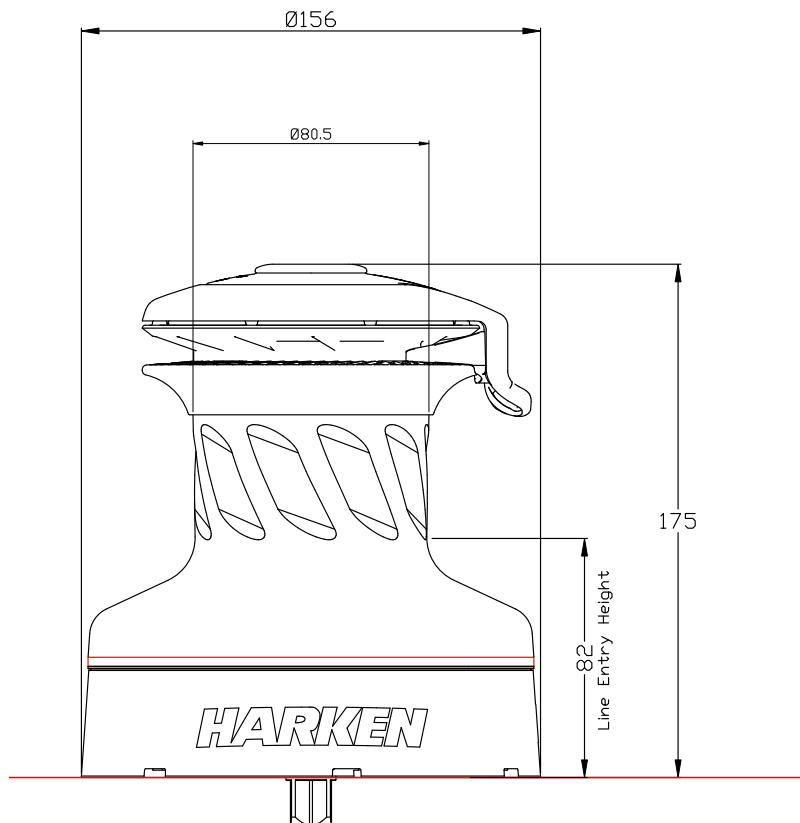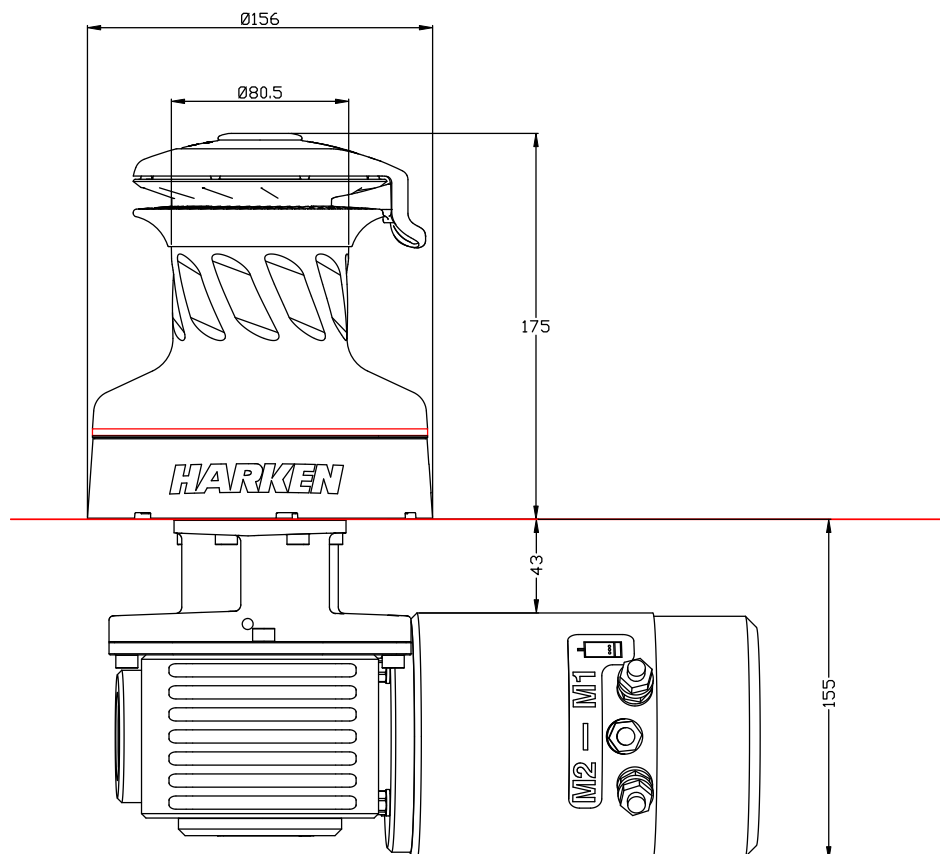Outline*Winch 40.2 ST EL/HY**Horizontal electric motor (12V / 24V)*

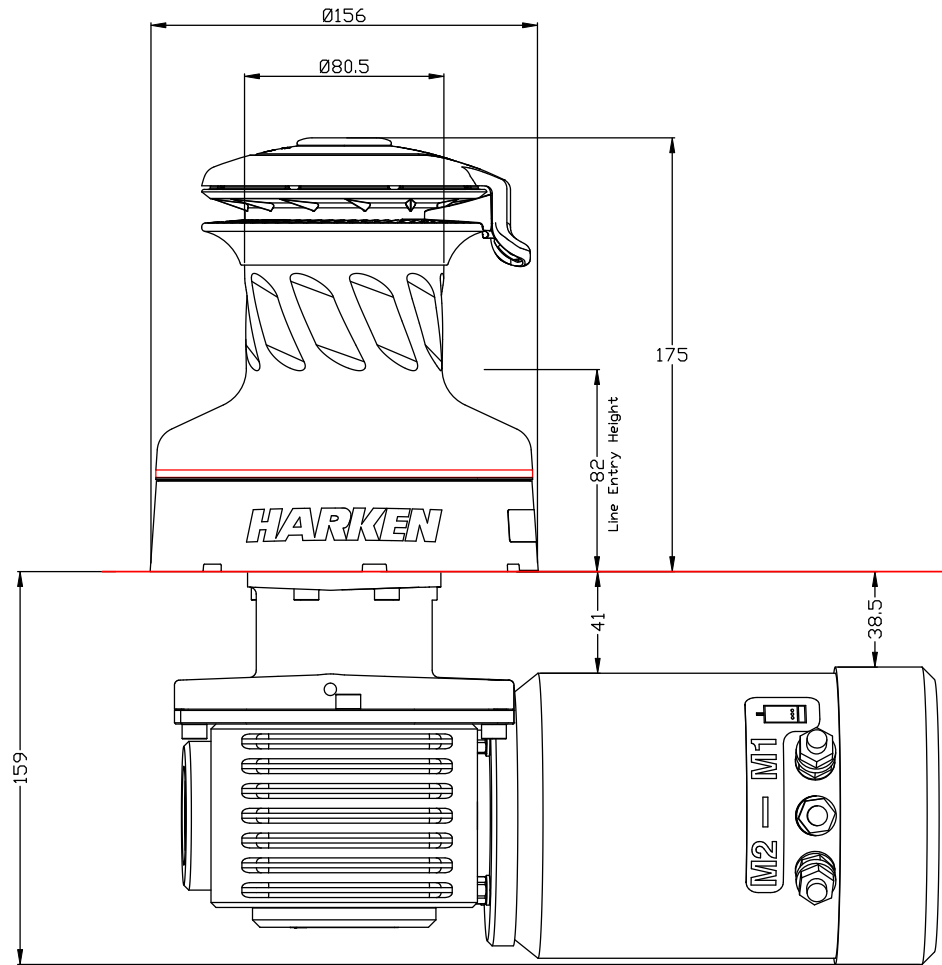Horizontal electric motor (48V)

Installation

The winch must be installed on a flat area of the deck, reinforced if necessary to bear a load equal to at least twice the maximum working load of the winch.

It is the installer's responsibility to carry out all structural tests needed to ensure that the deck can bear the load.

Harken does not supply the screws needed to install the winch since these may vary depending on the deck on which it is to be installed.

It is the installer's responsibility to choose the correct screws taking account of the loads they will have to bear.

Harken assumes no responsibility for incorrect installation of its winches or for an incorrect choice of mounting screws.



DANGER!

Incorrect installation of the winch may cause severe injury or death. Consult the yard that built the boat in the case of doubt over the correct positioning of the winch.




WARNING!

Failure to use the correct number and type of mounting fasteners or failure to ensure the correct deck strength can result in the winch pulling off the deck suddenly and unexpectedly during high loads causing severe injury or death.




WARNING!

Verify the entry angle of the sheet. This must be 8° with tolerance of $\pm 2^\circ$, to avoid sheet overrides and damaging the winch or making the winch inoperable leading to loss of control of the boat which can lead to severe injury or death.



WARNING!

Mount the winch on the deck so that the drive gear is positioned where the sheet enters the winch drum. Incorrect position of drive gear can weaken winch leading to failure which can cause an accident leading to severe injury or death.



NOTICE

For winch STA, STC and STCW versions only
You can find the icon ▲ on the skirt to identify the drive gear position.



After correctly positioning the final drive gear with respect to the load, check that the motor, gearing, electrical wiring and/or hydraulic pipes can be housed below decks. To help find the optimal compromise, remember that, to make the installation of the motor easier, it can be coupled to the winch in different positions.

Once you have decided the correct mounting position for the winch on the deck and checked the space available below deck, proceed with the installation.


The winch can be installed following one of the two procedures below (Procedure 1 or Procedure 2):

Procedure 1

To install the winch you must remove the drum and use Socket Head (SH) bolts.

Tools needed:  One medium flat-bladed screwdriver

To identify the various parts, refer to the exploded view at the end of this Manual.

 Torque to apply when assembling



1. Pull out the disconnect rod




2. Unscrew the central screw ( 2Nm/18 in-lb)



3. Slide off the assy socket and the cover.
Pay attention to the o-ring in the socket.



4. Unscrew the three screws
( 4Nm/35 in-lb)



5. Remove the self-tailing arm n°26 by rotating and lifting it.



6. Lift off the drum n°22

Install the winch on the deck in the position you have chosen, keeping in mind the limits described on page 6 and using socket head (SH) bolts.

Procedure 2 (not pertinent for ST BBB/CCC versions)

To install the winch, remove the winch skirt and use hexagonal headed (HH) bolts.


Tools needed:  One medium flat-bladed screwdriver

To identify the various parts, refer to the exploded view at the end of this Manual.

See (paragraph on installation) the limits described on page 6 and using socket head (SH) bolts.

 Torque to apply when assembling



1. Remove the skirt with the help of the screwdriver placed as shown by the symbol 



2. Take off the base



3. Position the five M6 hexagonal headed bolts in their holes



4. Reposition the skirt in its housing



5. Press down the skirt to position it correctly

NOTICE

Make sure the skirt is correctly clipped on to the base of the winch.

Install the winch on the deck in the position you have chosen, keeping in mind the limits described on page 6 and using hexagonal headed bolts.

Winch installation procedure


Carry out Procedure 1 or Procedure 2, then install the winch on the deck in the chosen position.

NOTICE

Before drilling the deck, check the space available below deck for the flange and the motor

A. Position the base of the winch on the deck and mark the position of the holes or use the drilling cut-out template at the point where you have decided to place the winch.

Below is a reduced scale diagram.

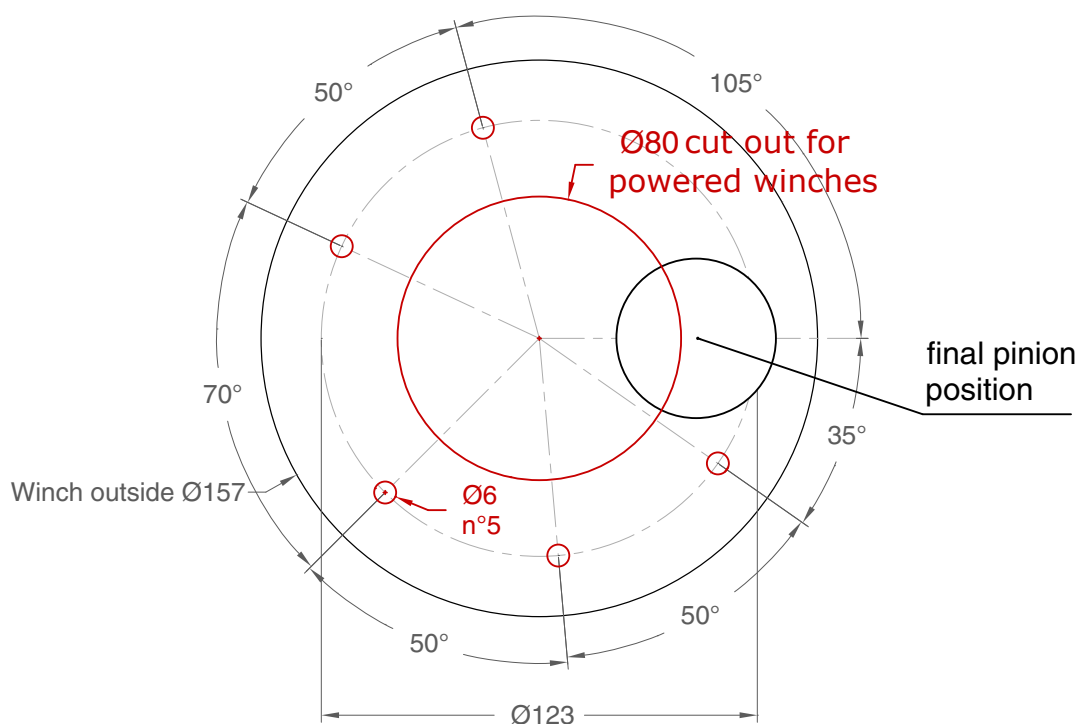

The drilling cut out template is available on the Harken® website, www.harken.com

B. Remove the winch and drill the five 6.2 mm and a 80 mm diameter holes.

C. Bolt the base of the winch to the deck using five M6 bolts (not supplied by Harken®) as described at Procedure 1 or Procedure 2, correctly chosen for the thickness and type of the boat deck. Consult the yard that built the boat in case of doubt.



WARNING!

To install the winch on the deck, use only bolts in A4 stainless steel (DIN 267 part11). Bolts made of other materials may not have sufficient strength or may corrode which can result in winch pulling off deck suddenly and unexpectedly during high loads causing severe injury or death.

NOTICE

To mount winches on the deck, do not use countersunk bolts.

D. Fill the mounting holes with a suitable marine sealant.

E. Remove the excess adhesive/sealant from the holes and base drainage channels

F. Reassemble the winch following the steps in **Procedure 1** or **Procedure 2** in the reverse order, and apply the products indicated in the section on maintenance.

NOTICE

Before closing the winch, make sure the holes and drainage channels in the base of the winch are not obstructed.

Positioning the self-tailing arm

Position the self-tailing arm so that the line leaving the winch is led into the cockpit.

Motor installation procedure**WARNING!**

Make sure that the electric power is switched off before installing or carrying out maintenance on the winch.

**WARNING!**

The entire gearmotor assembly is IP54 graded: install the device under the deck, in a dry place and protected from the external environment, in a position where it is possible to check its status.

Once you have installed the winch on the deck, proceed with motor installation. The motor can be coupled to the winch in different positions. Check the space available below deck and choose the suitable position.

Tools needed

A number five hex key



A number six hex key (only for vertical electric motor)



A number ten hex key (only for hydraulic motor)

Two number thirteen wrenches



1. Position the flange



2. Tighten six M6 precote coated screws
(8 Nm/ 71 in-lb)



3. Position the reduction gear and motor



4. Tighten the two screws ($\approx 8 \text{ Nm} / 71 \text{ in-lb}$). Be sure to align the flange.

NOTICE

Before positioning the flange, check to make sure that seals (the first one is above the flange and the second one is under the flange) are seated correctly.



After winch is assembled and before sailing, test the powered winch functioning: insert the lock-in winch handle in the handle socket and check that the disconnect rod must disconnect gearbox.

Electric equipment

To guarantee greater efficiency in terms of safety and long life, for every winch model is mandatory to install the Dual Function Control Box.

To fasten the Dual Function Control Box containing solenoids to bulkhead or wall, for all installation details and for all electric wiring schemes, refer to the Dual Function Control Box manual.



WARNING!

Before installing and using the device, read carefully the Dual Function Control Box manual available on web site www.harken.com

Winch size	Current voltage	Under 16.4 ft AWG	Under 5 m mm ²	16.4-32.8 ft AWG	5 m-10 m mm ²	32.8-49.2 ft AWG	10 m-15 m mm ²	49.2-65.6 ft AGW	15m-20 m mm ²
40.2	12V	2	32	0	50	00	70	000	95
40.2	24V	5	16	3	25	2	35	0	50
40.2	48V	8	8	16	14	4	18	3	25

Refer to the following chart for HCP model:

Winch size	Current voltage	HCP model	Ampere rating
40.2	12V	HCP1717	80A
40.2	24V	HCP1717	80A
40.2	48V	HCP1717	80A

NOTICE

To connect motor, attach cable terminals to clamps between nut and lock nut. Hold nut in contact with motor using a spanner and tighten other nut with second spanner. Take special care not to turn the central spindles. These instructions apply when assembling and disassembling. We recommend using a torque wrench so as to obtain a torque equal to and no greater than 10 Nm (88 in-lb).



NOTICE

Note that correct electrical contact sequence is:
Nut – Cable Terminal – Self-Locking Washer – Lock Nut



Maintenance

Washing

Winches must be washed frequently with fresh water, and in any case after each use.

Do not allow teak cleaning products or other cleaners containing caustic solutions to come into contact with winches and especially anodised, chrome plated or plastic parts.

Do not use solvents, polishes or abrasive pastes on the logos or stickers on the winches.

Do not use polishes or abrasive pastes on anodised, chromed plated or plastics surfaces.

Make sure that the holes and drainage channels in the base of the winch are not obstructed so that water does not collect.

Maintenance table

Winches must be visually inspected at the beginning and end of every season of sailing or racing.

In addition they must be completely overhauled, cleaned and lubricated at least every 12 months.

After an inspection, replace worn or damaged components. Do not replace or modify any part of the winch with a part that is not original.



WARNING!

Periodic maintenance must be carried out regularly. Lack of adequate maintenance shortens the life of the winch, can cause serious injury and also invalidate the winch warranty.

Installation and maintenance of winches must be carried out exclusively by specialized personnel.







WARNING!

Make sure that the power of the electric system is switched off before carrying out maintenance on the winch.

In the case of doubt contact Harken Tech Service at techservice@harken.it

Disassembly procedure

Tools needed:

-  One medium flat-bladed screwdriver
-  A number five hex key
-  Brush
-  Rags

To identify the various parts refer to the exploded view at the end of this Manual.

 Torque to be applied in assembly phase

Carry out **Procedure 1** as shown in the paragraph on winch installation and then do the following:



6. Completely unscrew the three screws; remove the stripper arm support



7. Slide out the central shaft



8. Unscrew the 6 hex screws ($\approx 8\text{Nm}/70\text{ in-lb}$)



9. Remove the assy housing
Important: washer may remain inside the drum support!



10. Remove the washer



11. Remove the gear



12. Remove the pawls carrier



13. Remove the gear



14. Remove the gear



15. Remove the gear



16. Remove the pawls carrier



17. Remove the washer

If it is necessary to replace any jaws of the winch, proceed as follows:



I. Unscrew the 4 screws
($\approx 4\text{Nm}/35\text{ in-lb}$)



II. Remove the jaws

Once the winch is completely disassembled, clean the parts with a degreasing that does not leave residues, proper to clean metal components; rinse plastic parts in fresh water. Once you have done this, dry the parts with cloths that do not leave residue.

Inspect gears, bearings, pins and pawls for any signs of wear or corrosion.

Carefully check the teeth of gears and ring gears to make sure there are no traces of wear.

Check the roller bearings and check there are no breaks in the bearing cages.

Replace worn or damaged components.


Carry out maintenance on components using the products listed below.

For more information on which products to use where, refer to the exploded diagram below.

Use a brush to lightly lubricate all gears, gear pins, teeth and all moving parts with grease.

Lightly lubricate the pawls and springs with oil. Do not use grease on the pawls!

Exploded view with maintenance products

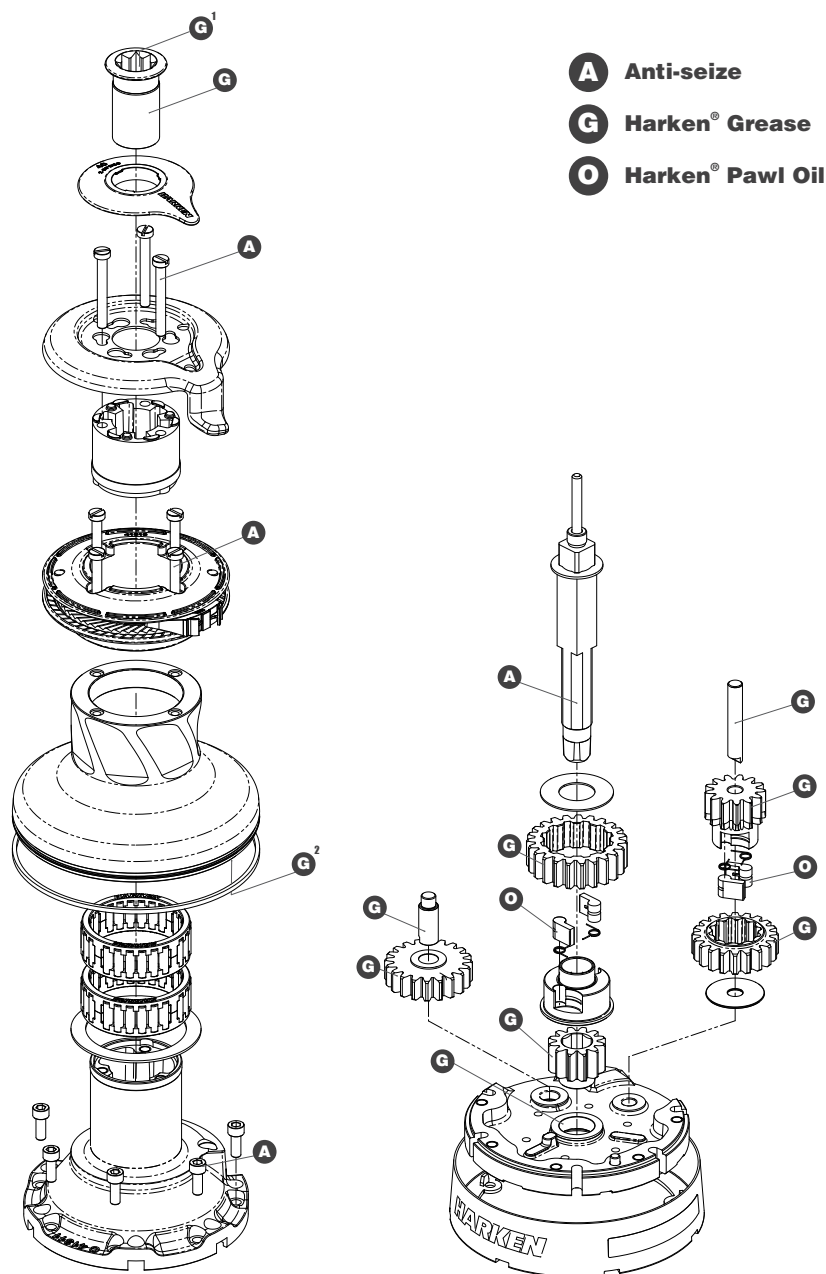

Apply Harken® grease where indicated above
 Apply Harken® grease: 1. on assy socket screw - 2. on drum gear

NOTICE

On every gear and every component that must be greased, apply Harken® grease with a brush in a proper quantity as shown below:



NOTICE

Harken® grease to apply on all teeth: do not use excessive quantity of product to void wastes. If in contact with the pawls, an excess of grease can compromise the safety of the winch.

Assembly

Make sure that the holes and drainage channels in the base of the winch are not obstructed. Assemble the winch in the reverse order of the sequence in the section of disassembly.


To tighten bolts, use the torque indicated in the disassembly procedure.



When positioning the stripper arm, align the peeler with it.




If the jaws have been disassembled, insert peeler between the two jaws, taking care that the letters TOP on the peeler are facing upwards.

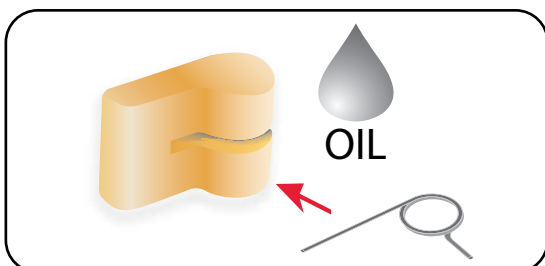

To assemble the pawls

Correctly position the spring in its housing as shown at left. Hold the spring closed and slide the pawl into its housing. Once in position, check that the pawls can be easily opened and closed with a finger.

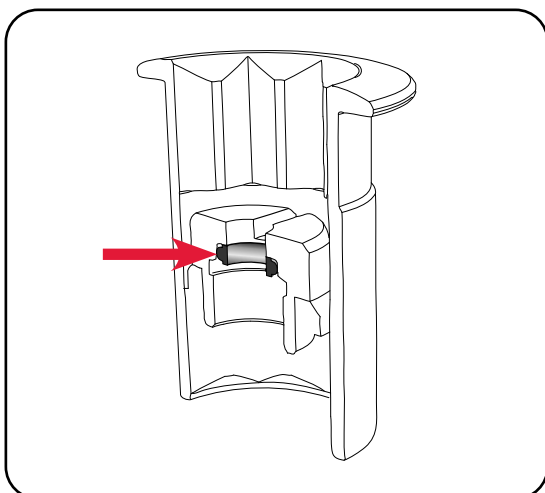

NOTICE

Before screw the central screw, check the correct position of the o-ring in the assy socket and apply Harken® grease.

In case of doubt concerning the assembly procedure contact Harken Tech Service: techservice@harken.it

Harken® limited worldwide warranty

Refer to the Harken® Limited Worldwide Warranty in the Harken Catalogue and on the website www.harken.com

Ordering spare parts

Spare parts can be requested from Harken as described in the Harken® Limited Worldwide Warranty, indicating the part number in the Parts List and including the serial number of the winch for which the parts are required.

The serial number of the winch is printed on a plate on the drum support of the winch.



Manufacturer

Harken® Italy S.p.A.

Via Marco Biagi, 14
22070 Limido Comasco (CO) Italy
Tel: **(+39) 031.3523511**
Fax: **(+39) 031.3520031**
Email: **info@harken.it**
Web: **www.harken.com**

● **Tech Service**
Email: **techservice@harken.it**

● **Customer Service**
Tel: **(+39) 031.3523511**
Email: **info@harken.it**


Headquarters


Harken®, Inc.

1251 East Wisconsin Avenue
Pewaukee, Wisconsin 53072-3755 USA
Tel: **(262) 691.3320**
Fax: **(262) 691.3008**
Email: **harken@harken.com**
Web: **www.harken.com**

● **Tech Service**
Email: **technicalservice@harken.com**

● **Customer Service**
Tel: **(262) 691-3320**
Email: **customerservice@harken.com**

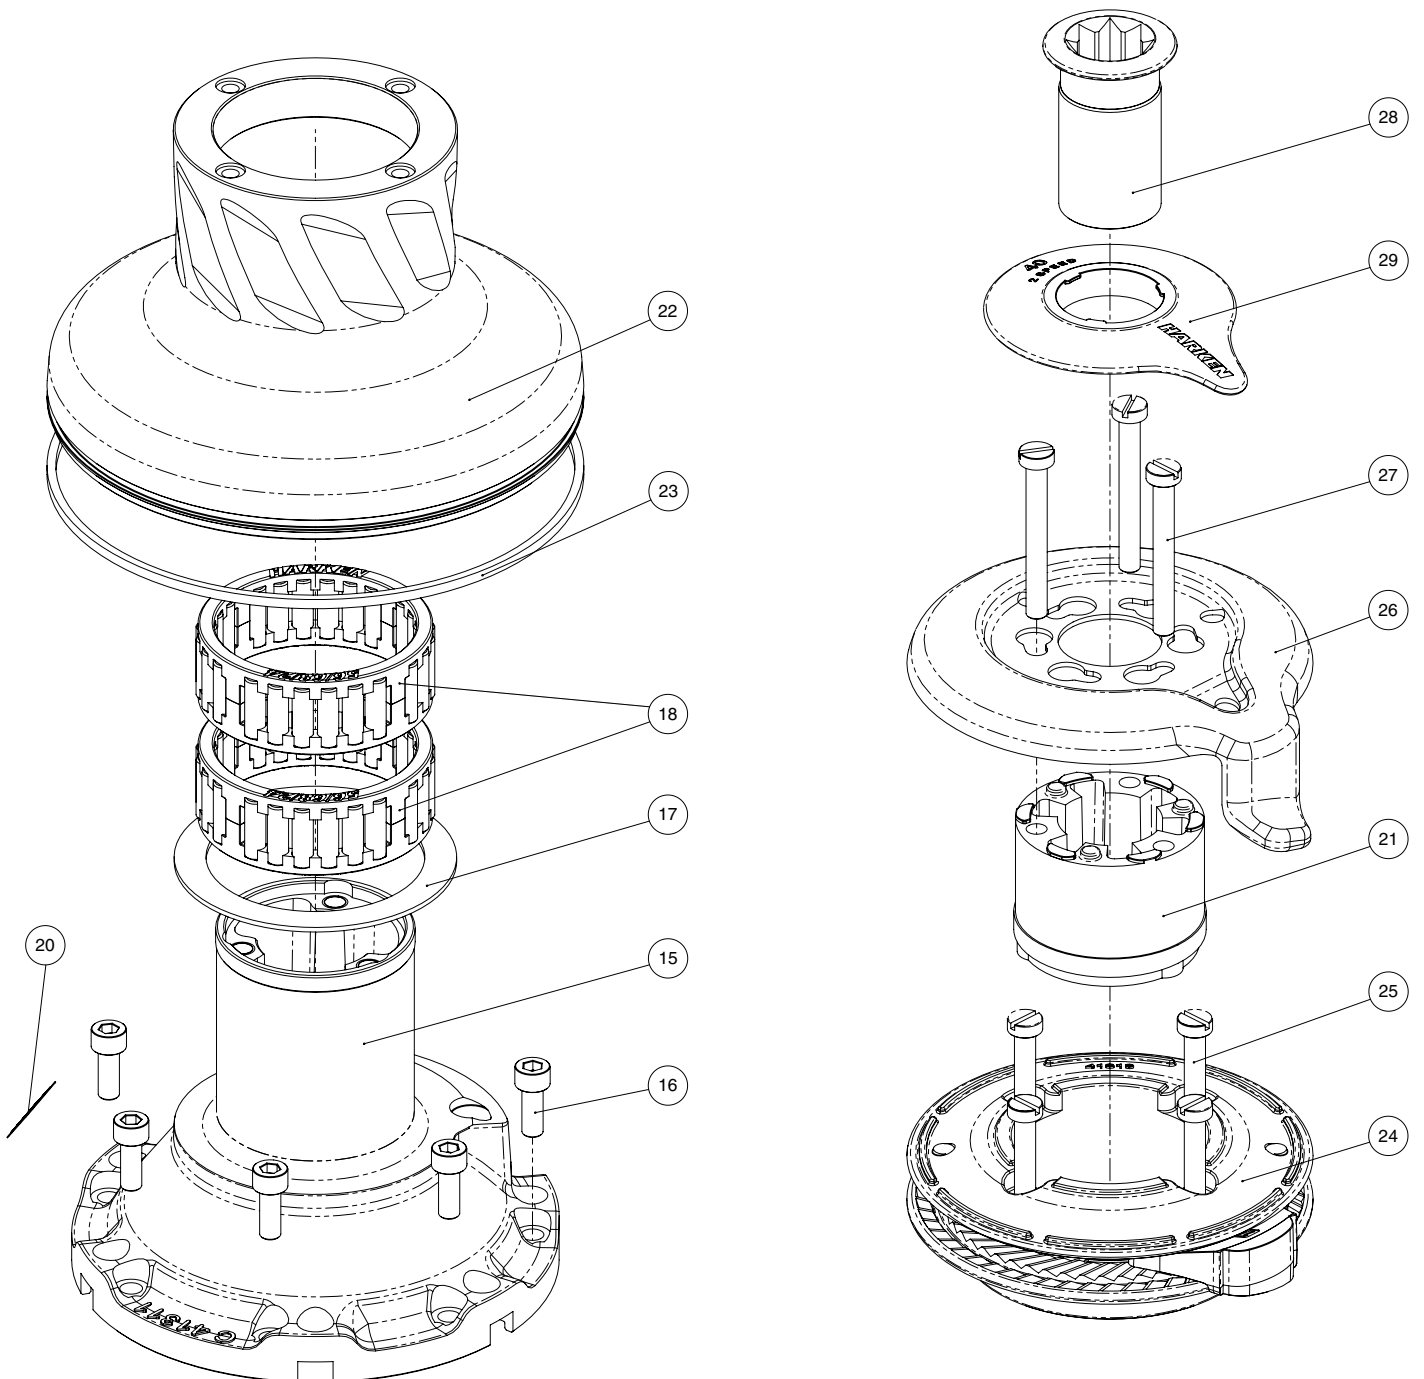Exploded view*Radial Winch 40.2 STA, STC - STCW EL*

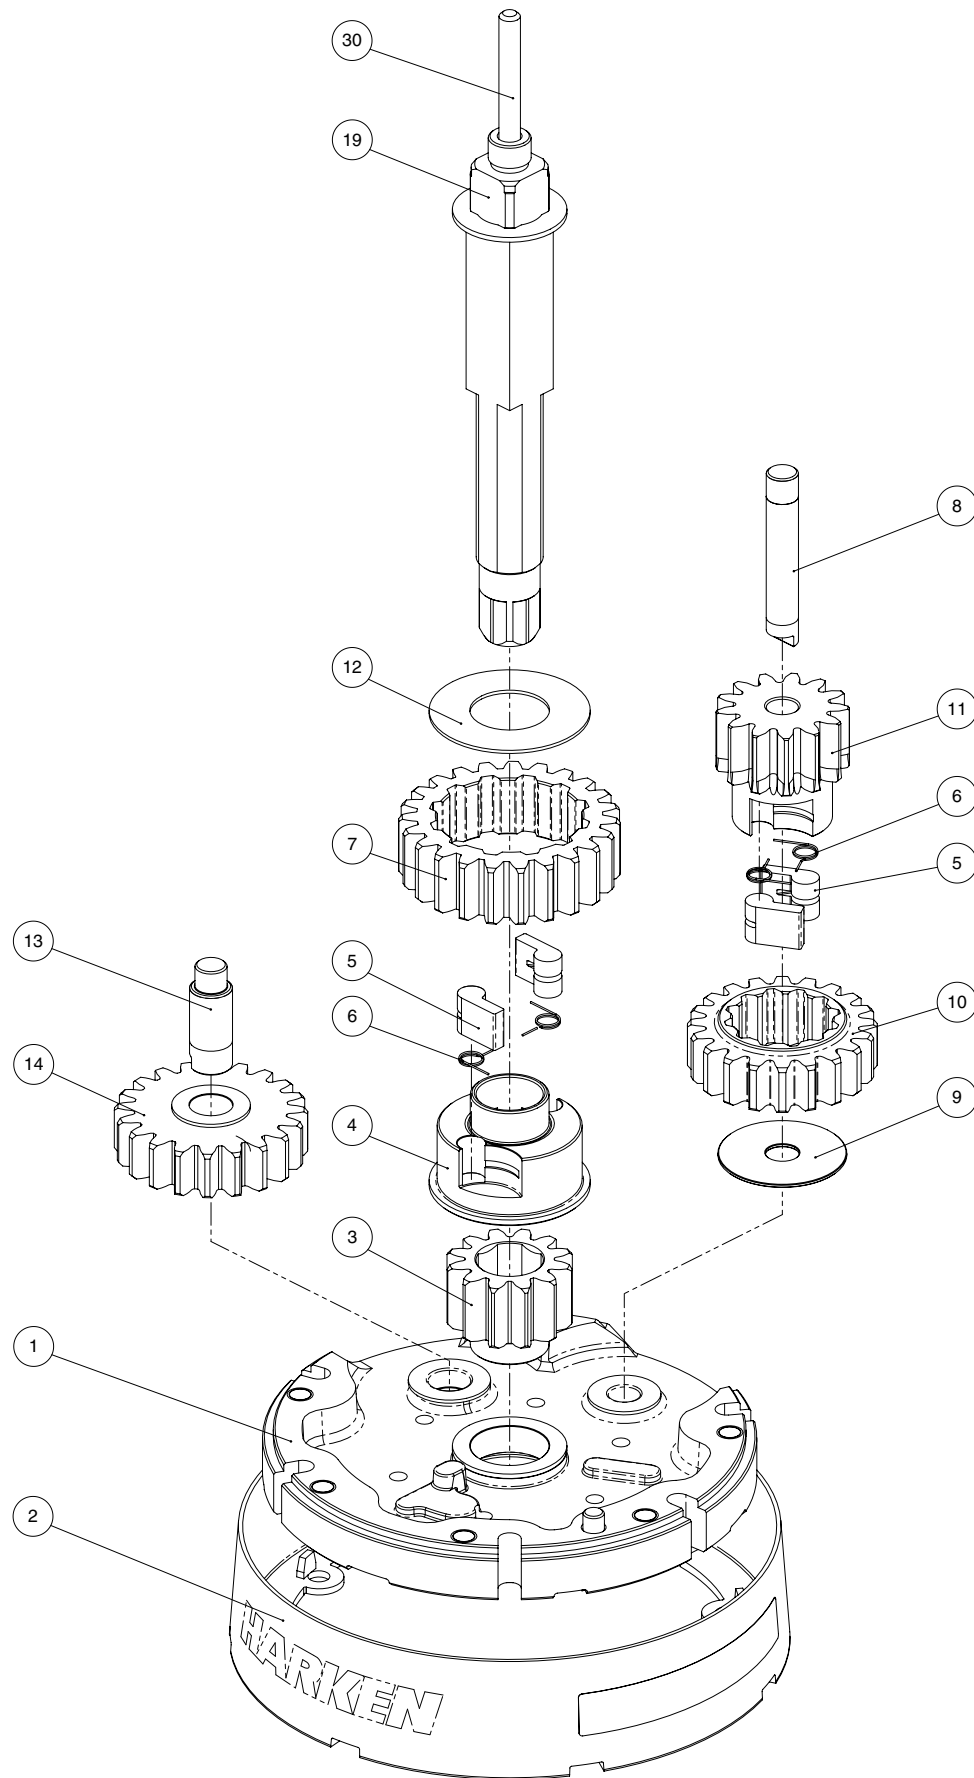Radial Winch 40.2 STA, STC - STCW EL

Parts List

Radial Winch 40.2 STA EL

A = drum in anodised aluminium

Pos.	Q.ty	Code	Description	Pos.	Q.ty	Code	Description
1	1	A94189600	Assy Base Winch 40 EL/HY	18	2	A74136000	Bearing Ø56xØ68x24
	1	S413350080	Base W40	19	1	A94149800	Assy Central Shaft W40 EL/HY
	1	S4130900A7	Roller Ø6x19		1	S413880002	Central Shaft Pred. W40
	1	S413960085	Bushing Ø22xØ25x8.5				Washer Ø17.2xØ32x1.5
	1	S413330085	Bushing Ø9xØ11x12	20			Winch Serial Number Sticker
	1	S413330085	Bushing Ø12xØ14x11	21	1	S4129400A0	Stripper arm support
2	1	A94141400	Assembly Skirt Winch 40	22	1	S414170053	Drum A W40
			Skirt W40	23	1	S281680097	Red line
			Winch Product Sticker**	24	1	A94131800	Assy Winch 40 Jaws
3	1	S413020004	Gear Z12				Lower Jaw W35/40
4	1	S413030004	Pawls Carrier Ø8xN2				Upper Jaw W35/40
5	4	S000080003	Pawl Ø8*		1	S413610080	Peeler W20 - 40
6	4	S000380001	Pawl Spring Ø8*		4	S385970001	Spring
7	1	S412830041	Gear Z23	25	4	M0601803	Screw UNI EN ISO 1207 - M6x35 - A4
8	1	S413000004	Pin Ø9x55	26	1	S414200019	Stripper Arm W35/40
9	1	S279090002	Washer Ø36xØ9,5x1	27	3	M6007103	Screw M6x50 UNI6107
10	1	S412970004	Gear Z20	28	1	A94149300	Assy Socket W35-80 EL/HY
11	1	S412850041	Pinion Z13				Socket Handle W20/80
12	1	S413120002	Washer Ø22.5xØ45x1		1	S414940085	Washer Ø25xØ15x4
13	1	S413070004	Pin Ø9xØ12x32.5		1	S414930003	Nut Screw for Disconnect Rod
14	1	A94130500	Assy Gear Z20		1	M0679797	O ring RC 2025 series
			Gear Z20	29	1	S4141900A5	Cover 2 speed W40
	2	S414900080	Bushing Ø12xØ14x8	30	1	S415060002	Disconnect Rod W40
15	1	A94141500	Assy Housing Winch 40				
			Support W40				
	2	S414890080	Bushing Ø9xØ11x7				
	1	S4130900A7	Bushing Ø22xØ25x8.5				
16	6	M0635103	Socket head screw M6x16 UNI5931				
17	1	S413150082	Washer Ø62xØ80x1.5				

*Available with service kit; see website www.harken.com

**Winch product sticker



Radial Winch 40.2 STC EL

C = drum in chrome bronze

Pos.	Q.ty	Code	Description	Pos.	Q.ty	Code	Description
1	1	A94189600	Assy Base Winch 40 EL/HY Base W40	18	2	A74136000	Bearing Ø56xØ68x24
	1	S413350080	Roller Ø6x19	19	1	A94149800	Assy Central Shaft W40 EL/HY Central Shaft Pred. W40
	1	S4130900A7	Bushing Ø22xØ25x8.5		1	S413880002	Washer Ø17.2xØ32x1.5
	1	S413960085	Bushing Ø9xØ11x12	20			Winch Serial Number Sticker
	1	S413330085	Bushing Ø12xØ14x11	21	1	S4129400A0	Stripper arm support
2	1	A94141400	Assembly Skirt Winch 40 Skirt W40 Winch Product Sticker**	22	1	S414180043	Drum W40 C
3	1	S413020004	Gear Z12	23	1	S281680097	Red line
4	1	S413030004	Pawls Carrier Ø8xN2	24	1	A94131800	Assy Winch 40 Jaws Lower Jaw W35/40 Upper Jaw W35/40
5	4	S000080003	Pawl Ø8*		1	S413610080	Peeler W20 - 40
6	4	S000380001	Pawl Spring Ø8*		4	S385970001	SPRING
7	1	S412830041	Gear Z23	25	4	M0601803	Screw UNI EN ISO 1207 - M6x35 - A4
8	1	S413000004	Pin Ø9x55	26	1	S414200019	Stripper Arm W35/40
9	1	S279090002	Washer Ø36xØ9,5x1	27	3	M6007103	Screw M6x50 UNI6107
10	1	S412970004	Gear Z20	28	1	A94149300	Assy Socket W35-80 EL/HY Socket Handle W20/80
11	1	S412850041	Pinion Z13		1	S414940085	Washer Ø25xØ15x4
12	1	S413120002	Washer Ø22.5xØ45x1		1	S414930003	Nut Screw for Disconnect Rod
13	1	S413070004	Pin Ø9xØ12x32.5		1	M0679797	O ring RC 2025 series
14	1	A94130500	Assy Gear Z20 Gear Z20	29	1	S4141900A5	Cover 2 speed W40
	2	S414900080	Bushing Ø12xØ14x8	30	1	S415060002	Disconnect Rod W40
15	1	A94141500	Assy Housing Winch 40 Support W40				
	2	S414890080	Bushing Ø9xØ11x7				
	1	S4130900A7	Bushing Ø22xØ25x8.5				
16	6	M0635103	Socket head screw M6x16 UNI5931				
17	1	S413150082	Washer Ø62xØ80x1.5				

*Available with service kit; see website www.harken.com

**Winch product sticker



Radial Winch 40.2 STCW EL


CW = chrome/white


Pos.	Q.ty	Code	Description	Pos.	Q.ty	Code	Description
1	1	A94189600	Assy Base Winch 40 EL/HY	17	1	S413150082	Washer Ø62xØ80x1.5
			Base W40	18	2	A74136000	Bearing Ø56xØ68x24
	1	S413350080	Roller Ø6x19	19	1	A94149800	Assy Central Shaft W40 EL/HY
	1	S4130900A7	Bushing Ø22xØ25x8.5				Central Shaft Pred. W40
	1	S413960085	Bushing Ø9xØ11x12			1	S413880002
	1	S413330085	Bushing Ø12xØ14x11	20			Winch Serial Number Sticker
2	1	A94141400W	Assembly Skirt Winch 40 RAL	21	1	S4129400A0	Stripper arm support
			9003	22	1	S414180043	Drum C W40
			Skirt W40 RAL9003	23	1	S281680097	Red line
			Winch Product Sticker**	24	1	A94131800W	Assy Winch 40 Jaws
3	1	S413020004	Gear Z12				
4	1	S413030004	Pawls Carrier Ø8xN2	1	4	S413610080W	Peeler W20 - 40 RAL9003
5	4	S000080003	Pawl Ø8*	25	4	M0601803	Screw UNI EN ISO 1207:1996
6	4	S000380001	Pawl Spring Ø8*	26	1	S414200019	Stripper Arm W35/40
7	1	S412830041	Gear Z23	27	3	M6007103	Screw M6x50 UNI6107
8	1	S413000004	Pin Ø9x55	28	1	A94149300	Assy Socket W35-80 EL/HY
9	1	S279090002	Washer Ø36xØ9,5x1				Washer Ø25xØ15x4
							Nut Screw for Disconnect Rod
10	1	S412970004	Gear Z20				O ring RC 2025 series
11	1	S412850041	Pinion Z13	29	1	S4141900A5W	Cover 2 speed W40 RAL 9003
12	1	S413120002	Washer Ø22.5xØ45x1	30	1	S415060002	Disconnect Rod W40
13	1	S413070004	Pin Ø9xØ12x32.5				
14	1	A94130500	Assy Gear Z20				
			Gear Z20				
			Bushing Ø12xØ14x8				
15	1	A94141500	Assy Housing Winch 40				
			Housing W40				
			Bushing Ø9xØ11x7				
			Bushing Ø22xØ25x8.5				
16	6	M0635103	Socket head screw M6x16				
			UNI5931				

*Available with service kit; see website www.harken.com

**Winch product sticker

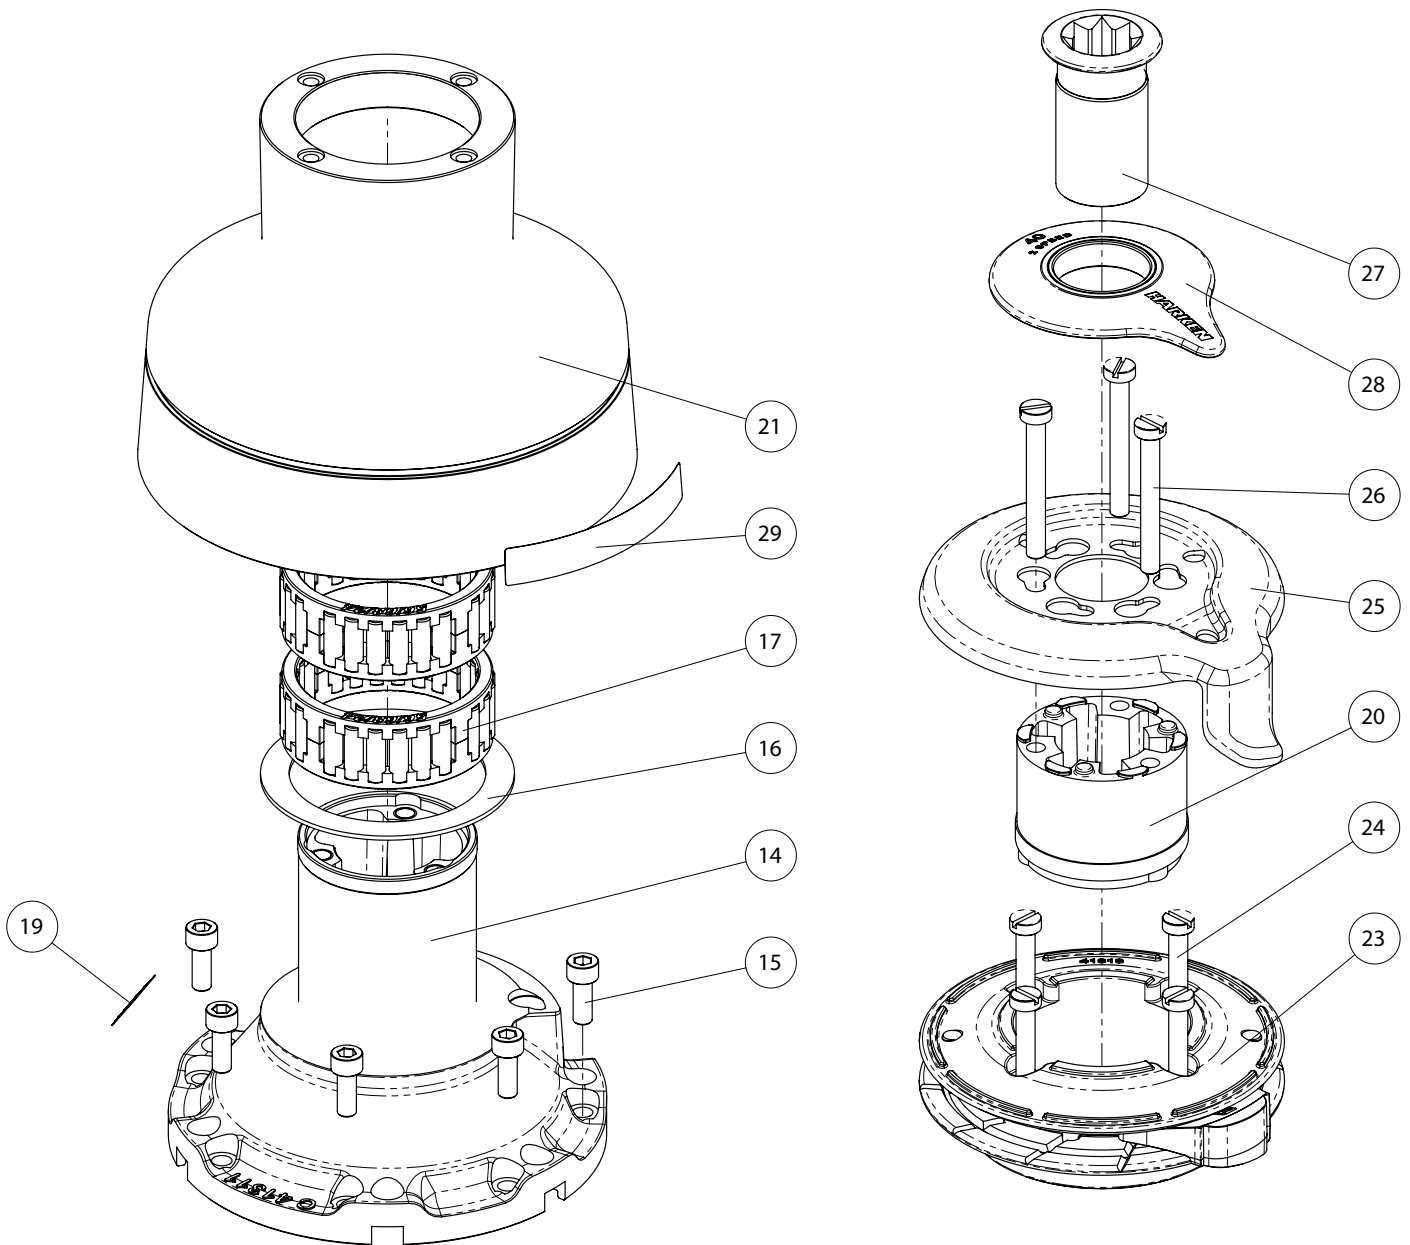

Radial Winch 40.2 STBBB - STCCC EL

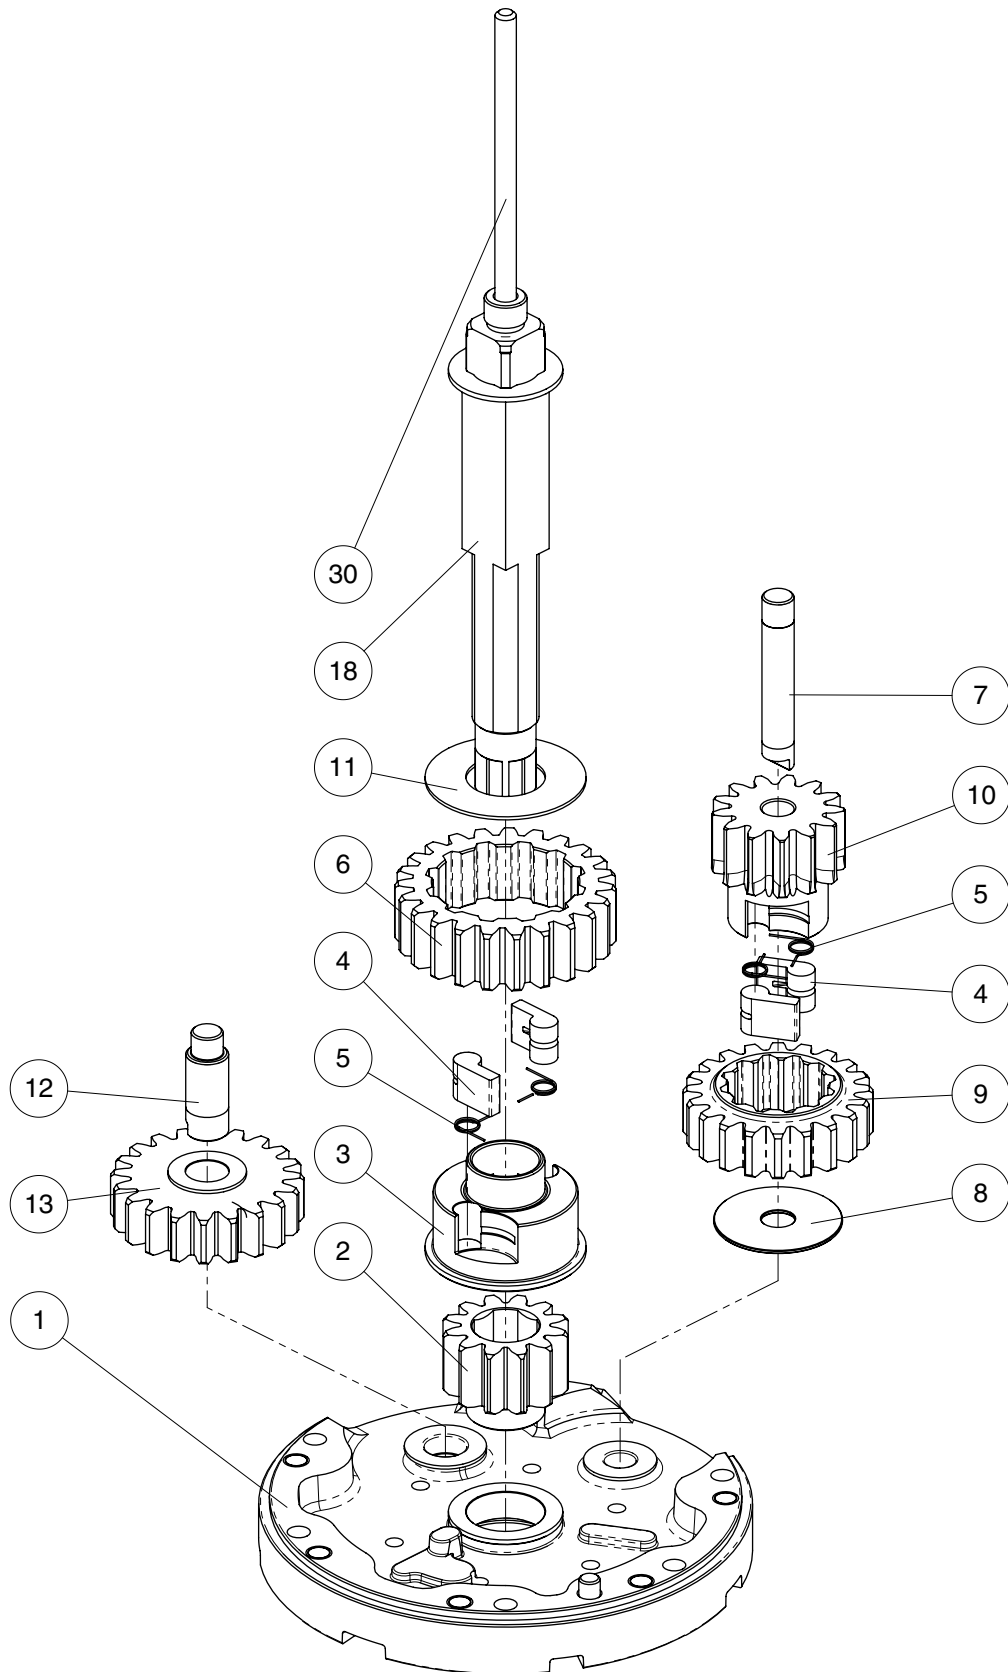Radial Winch 40.2 STBBB - STCCC EL

Radial Winch 40.2 STBBB EL

BBB = all bronze

Pos.	Q.ty	Code	Description	Pos.	Q.ty	Code	Description
1	1	A96633800	Assy base Winch 40 EL/HY Base W40	18	1	A94149800	Assy Central Shaft W40 EL/HY Central Shaft Pred. W40
	1	S413350080	Roller Ø6x19		1	S413880002	Washer Ø17.2xØ32x1.5
	1	S4130900A7	Bushing Ø22xØ25x8.5	19			Winch Serial Number Sticker
	1	S413960085	Bushing Ø9xØ11x12	20	1	S4129400A0	Stripper arm support
	1	S413330085	Bushing Ø12xØ14x11	21	1	S688160043	Drum W40 BBB
2	1	S413020004	Gear Z12	22	1	S281680097	Red line
3	1	S413030004	Pawls Carrier Ø8xN2	23	1	A96932800	Assy Jaws Winch 35/40 BBB Lower Jaw W35/40 BBB
4	4	S000080003	Pawl Ø8*				Upper Jaw W35/40
5	4	S000380001	Pawl Spring Ø8*		1	S413610080	Peeler W20 - 40
6	1	S412830041	Gear Z23		4	S385970001	Spring
7	1	S413000004	Pin Ø9x55	24	4	M0601803	Screw UNI EN ISO 1207- M6x35 - A4
8	1	S279090002	Washer Ø36xØ9,5x1	25	1	S7123000F0	Stripper Arm W35/40 BBB
9	1	S412970004	Gear Z20	26	3	M6007103	Screw M6x50 UNI6107
10	1	S412850041	Pinion Z13	27	1	A94149300	Assy Socket W35-80 EL/HY Socket Handle W20/80
11	1	S413120002	Washer Ø22.5xØ45x1		1	S414940085	Washer Ø25xØ15x4
12	1	S413070004	Pin Ø9xØ12x32.5		1	S414930003	Nut Screw for Disconnect Rod
13	1	A94130500	Assy Gear Z20 Gear Z20		1	M0679797	O ring RC 2025 series
	2	S414900080	Bushing Ø12xØ14x8	28	1	A76932600	Cover W40 BBB
14	1	A94141500	Assy housing Winch 40 Support W40	29			Winch Product Sticker**
	2	S414890080	Bushing Ø9xØ11x7	30	1	S415060002	Disconnect Rod W40
	1	S4130900A7	Bushing Ø22xØ25x8.5				
15	6	M0635103	Socket head screw M6x16 UNI5931				
16	1	S413150082	Washer Ø62xØ80x1.5				
17	2	A74136000	Bearing Ø56xØ68x24				

*Available with service kit; see website www.harken.com

**Winch product sticker



Radial Winch 40.2 STCCC EL

CCC = All-Chrome bronze

Pos.	Q.ty	Code	Description	Pos.	Q.ty	Code	Description	
1	1	A96633800	Assy Base Winch 40 EL/HY Base W40	18	1	A94149800	Assy Central Shaft W40 EL/HY Central Shaft Pred. W40	
	1	S413350080	Roller Ø6x19		1	S413880002	Washer Ø17.2xØ32x1.5	
	1	S4130900A7	Bushing Ø22xØ25x8.5	19			Winch Serial Number Sticker	
	1	S413960085	Bushing Ø9xØ11x12		20	1	S4129400A0	Stripper arm support
	1	S413330085	Bushing Ø12xØ14x11			21	1	S681050043
2	1	S413020004	Gear Z12	22	1		S281680097	Red line
3	1	S413030004	Pawls Carrier Ø8xN2	23	1	A96811900	Assy Jaws Winch 35/40 CCC Lower Jaw W35/40 CCC Upper Jaw W35/40 RAL9003 Peeler W20 - 40 RAL9003 SPRING	
4	4	S000080003	Pawl Ø8*		1	S413610080W S385970001		
5	4	S000380001	Pawl Spring Ø8*					
6	1	S412830041	Gear Z23		24	4	M0601803	Screw UNI EN ISO 1207 - M6x35 - A4
7	1	S413000004	Pin Ø9x55					
8	1	S279090002	Washer Ø36xØ9,5x1	25	1	S414200019	Stripper Arm W35/40	
9	1	S412970004	Gear Z20	26	3	M6007103	Screw M6x50 UNI6107	
10	1	S412850041	Pinion Z13	27	1	A94149300	Assy Socket W35-80 EL/HY Socket Handle W20/80 Washer Ø25xØ15x4 Nut Screw for Disconnect Rod O ring RC 2025 series	
11	1	S413120002	Washer Ø22.5xØ45x1		1	S414940085 S414930003		
12	1	S413070004	Pin Ø9xØ12x32.5					
13	1	A94130500	Assy Gear Z20 Gear Z20		1	M0679797		
	2	S414900080	Bushing Ø12xØ14x8					
14	1	A94141500	Assy Housing Winch 40 Support W40	28	1	A76811200	Cover W40 CCC	
	2	S414890080	Bushing Ø9xØ11x7	29			Winch Product Sticker**	
	1	S4130900A7	Bushing Ø22xØ25x8.5					
15	6	M0635103	Socket head screw M6x16 UNI5931	30	1	S415060002	Disconnect Rod W40	
16	1	S413150082	Washer Ø62xØ80x1.5					
17	2	A74136000	Bearing Ø56xØ68x24					


*Available with service kit; see website www.harken.com

**Winch product sticker




Horizontal electric motor 12V/ 24V / 48V


TOP VIEW



*** Motor installed in right-hand configuration.**



**** Motor installed in left-hand configuration.**

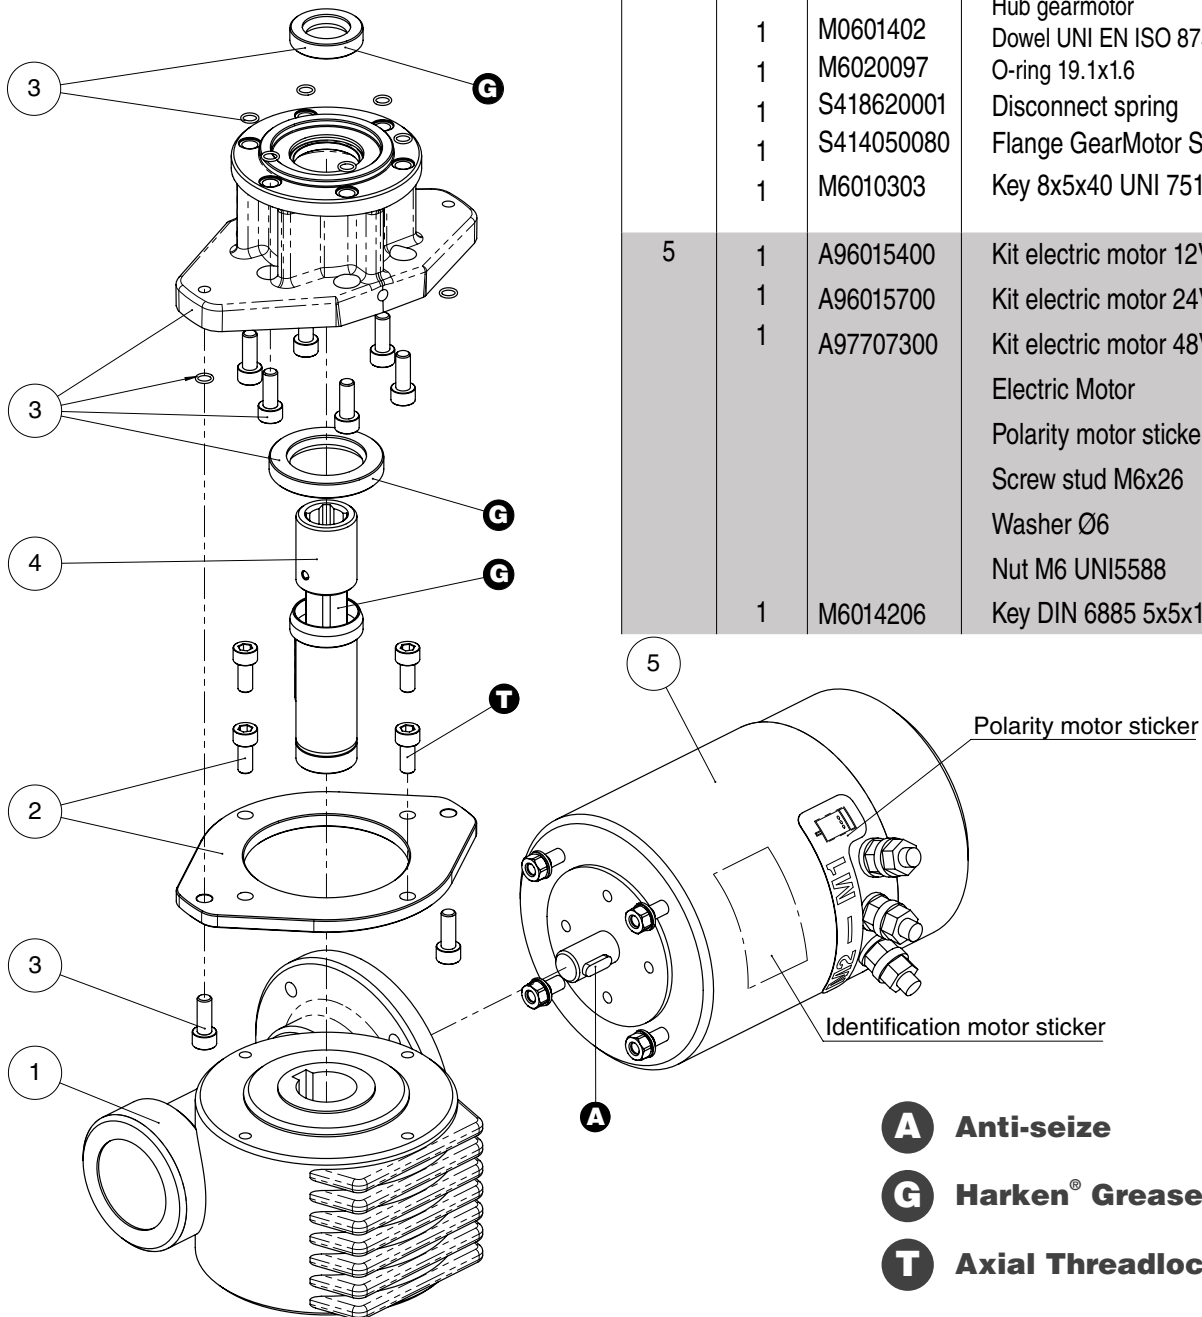

Pos.	Q.ty	Code	Description
1	1	A93127900	Kit Gear Reduction 1/24
	1	A94194900	Kit LM Gear Reduction 1/24
2	1	A94149200	Kit assembly electric motor flange
	1	A94149200L	Kit assembly electric motor flange left
	4	M0606803	Electric motor flange Screw M6x14 UNI 5931
3	1	A94149500	Kit electric horizontal motor flange
	1		Horizontal Motorgear Flange
	1		O-ring seal Ø5,5 x Ø1
	8		Lip seal Ø17xØ30x7
	1		Seal Ø30xØ47x7
8	S415360003	Screw M6x16 UNI EN ISO 5931:2003	
4	1	A94161600	Kit electric horizontal motor clutch
			Horizontal shaft gearmotor
			Hub gearmotor
	1	M0601402	Dowel UNI EN ISO 8752:2000- Ø4x24
	1	M6020097	O-ring 19.1x1.6
	1	S418620001	Disconnect spring
	1	S414050080	Flange GearMotor Shaft HO
1	M6010303	Key 8x5x40 UNI 7511	
5	1	A96015400	Kit electric motor 12V 0.7kW
	1	A96015700	Kit electric motor 24V 0.9kW
	1	A97707300	Kit electric motor 48V 2KW
			Electric Motor
			Polarity motor sticker
			Screw stud M6x26
			Washer Ø6
			Nut M6 UNI5588
	1	M6014206	Key DIN 6885 5x5x15

- A** Anti-seize
- G** Harken® Grease
- T** Axial Threadlocker